

**BWG-P-09-12**

## **Review of documentation for Low Carbon Emission bus testing and accreditation**

*This paper is provided for background to a presentation to be made to the BWG on the day which will review the appropriateness of the current documentation for testing and accreditation of low carbon buses.*

The Department for Transport have adopted the definition of a low carbon bus developed by the LowCVP in 2005. In support of this definition the Bus Working Group developed documentation for the testing and accreditation of low carbon buses. This was done for the Low Carbon Bus programme which was abandoned in 2006. The documentation foresaw the need for testing and accreditation for four types of powertrain;

1. Buses powered by conventional powertrain
2. Buses powered by charge sustaining hybrid powertrain
3. Buses powered by charge depleting hybrid powertrain
4. Buses powered by pure electric powertrain

The detailed test procedures were only documented for the second of these groups, charge sustaining hybrids, which was seen as the most likely type to be developed of the four.

LowCVP needs to ensure these documents are suitable for use in support of the testing and accreditation of low carbon emission buses for use by bus manufacturers in seeking accreditation as part of the audit trail for issuing bus operators with a low carbon emission bus certificate in order to claim the supplementary BSOG rate for low carbon emission buses.

### Issues to be addressed

- Documentation was developed for the Low Carbon Bus programme
- Documentation was only developed in full for charge sustaining hybrids

Attached are copies of the three papers approved by the BWG in 2005 and are provided for information only as back ground to a presentation by Millbrook on what is involved in ensuring the documentation is fit for purpose for testing and accreditation for the BSOG low carbon emission bus supplement.

# Certification process for buses meeting the Low Carbon Emission Bus incentive

July 2009

# Current situation

- DfT Guidance document for the bus manufacturers
  - Refers to 'accreditation and test procedures available from LCVP'
- Vehicle Accreditation Requirements
  - Overview document to point LCEB manufacturers towards detailed test procedures
- Detailed test procedures are identified as Annex A1 to A4
  - A1 - Conventional Powertrain ✖
  - A2 - Charge Sustaining Hybrid Powertrain ✔
  - A3 - Charge Depleting Hybrid Powertrain ✖
  - A4 - Pure Electric Powertrain ✖

# Proposed work

- An initial review of Vehicle Accreditation Requirements overview document
  - To ensure correlation to DfT's new document
- Review of Annex A2 to update details for accuracy
  - Reference to Low Carbon Emission Buses (LCEB), rather than the Low Carbon Bus Programme
- Development of Annex A1, A3 and A4
  - Estimate of 3 days required to do this
  - A1 – relatively straightforward as no electrical references
  - A3 – similar to A2 – but uses Reg 101 (plug-in hybrid technologies)
    - 1 test fully charged, 1 test fully discharged – warm-up procedures need to be very clear
  - A4 – Range and energy consumption
    - Details from Reg 101

## Accreditation of Low Carbon Buses

Following the definition of the emissions performance of Low Carbon Buses based on a Well-to-wheel CO<sub>2</sub> figure vs. passenger capacity, a standard for the testing and accreditation of Low Carbon Buses have been developed.

The standard is a structured document and includes an overview document with attached annexes and appendices

The overview document provides an explanation of the process by which Low Carbon Buses can be accredited and includes

- Definition of a low carbon bus
- CO<sub>2</sub> target
- Explanation of well-to-wheel CO<sub>2</sub> calculations
- Test requirements
- Test cycle definition
- Qualification requirements

The test requirements are provided as detailed annexes as follows

Annex A1	Test procedure for buses powered by conventional powertrain
Annex A2	Test procedures for buses powered by charge sustaining hybrid powertrain
Annex A3	Test procedures for buses powered by charge depleting hybrid powertrain
Annex A4	Test procedures for buses powered by pure electric powertrain

The development of these procedures builds on experience gained by The Energy Saving Trust in the testing of hybrid-electric and pure electric heavy-duty vehicles, and heavy-duty vehicles powered by conventional powertrain.

Procedures 1 to 3 have their origins in the procedure outlined in SAE J2711 – “Recommended Practice For Measuring Fuel Economy and Emissions of Hybrid-Electric and Conventional Heavy-Duty Vehicles”.

Procedure 4 is based on UNECE Regulation 101 – “Uniform provisions concerning the approval of passenger cars powered by a hybrid electric power train with regard to the measurement of the emission of carbon dioxide and fuel consumption and/or the measurement of electric energy consumption and electric range, and of categories M1 and N1 vehicles powered by an electric power train only with regard to the measurement of electric energy consumption and electric range”

and - BS EN 1986-1 – “The measurement of energy consumption and range of pure electric heavy-duty vehicles”

The content of both procedures is adapted to ensure suitability for the testing of heavy-duty vehicles and specifies the use of the Millbrook London Transport Bus Test cycle (MLTB)

Each procedure has associated appendices as follows:

- Appendix 1: London Transport Bus Test cycle
- Appendix 2: Examples of Well-to-Wheel calculations
- Appendix 3: Passenger capacity vs. Greenhouse Gas Emissions (CO<sub>2</sub> equivalence)
- Appendix 4: Essential characteristics of the vehicle
- Appendix 5: Test report and approval

The test and accreditation sub-group of the Low Carbon Bus Working Group reviewed these documents on 15 February 2005, and following recommendations for amendments, two documents are presented for review and final acceptance by the working group. These are:

- Guidelines for the Accreditation of Low Carbon Buses
- Annex A2 - Test procedures for buses powered by charge sustaining hybrid powertrain and appendices 1 - 5 as described above.

Annex A2 is the most complex of all the procedures and is therefore presented as the model for the others.

A method for determining the road load performance of Low Carbon Buses was also produced as an appendix. The sub-group felt that, whilst this procedure followed conventional practice as included within the procedures for emissions homologation of passenger cars, a simplified approach could be adopted for buses. This will involve the production of standard inertia and chassis dynamometer settings. It is proposed that this will be based on data from the body of data available from testing over the MLTB.

Whilst the standard is intended to include details of how manufacturers and operators can apply for Low Carbon Bus accreditation, the sub-group was unable to progress a number of items. These are:

- Definition of an application form for accreditation as a Low Carbon Bus
- Definition of any financial aid or grant structure

It is assumed that these issues will be addressed as the Low Carbon Bus programme is defined.

Steve Bell

28 February 2005

# **Vehicle Accreditation Requirements**

## **Low Carbon Bus Programme**

## Table of Contents

Introduction	3
Scope	4
Definition of a Low Carbon Bus	4
Low Carbon Technologies	4
Eligible Vehicles	4
Low Carbon Bus Emissions Requirements	4
Test Requirements	6
Eligible Test Centres	8
Test Fuel	9
Accreditation	9
Right of Suspension and/or Termination	9
Appendix 1 – Millbrook London Transport Bus (MLTB) Drive-Cycle	10
Appendix 2 - Low Carbon Bus CO2 emissions target line	11

## Introduction

"The Low Carbon Bus Programme" is the name given to a government funded programme run by the Low Carbon Vehicle Partnership (LCVP) which offers grants to companies to assist them with the cost of purchasing Low carbon Buses (as defined by LCVP) or converting existing vehicles to reduce carbon emissions.

This document sets out the requirements and conditions for manufacturers and converters of Low Carbon Buses, that wish to apply for Low Carbon Bus "Vehicle Approval" i.e. for approval of a Vehicle Type under the Low Carbon Bus programme. A Vehicle Type is defined by its make, model and variant and by its powertrain and fuel system. A Low Carbon Bus Application Form, supplied with these guidelines, should be completed for each Vehicle Type for which approval is sought.

To obtain Vehicle Approval a Low Carbon Bus must meet legislative and safety requirements, its emissions over a given test cycle must meet LCVP requirements, and details of the powertrain and fuel system fitted to the vehicle and of how the equipment is installed must be provided.

Additional information as detailed in this and its associated documents must be made available to LCVP

Approved vehicles and details of which companies are approved to supply them will be listed on the Low Carbon Bus Register at [website address if appropriate]

Completed application forms should be returned to:

The Low Carbon Vehicle Partnership  
17, Queen Anne's Gate  
London,  
SW1H 9BU

## Scope

This document sets out the requirements and conditions that must be met by providers of Low Carbon Vehicle technologies that wish to apply for approval for a Low Carbon Bus.

## Definition of a Low Carbon Bus

The specific definition of a Low Carbon Bus is as follows:

“A Low Carbon Bus produces at least 30% fewer Greenhouse Gas Emissions than a current Euro 3 equivalent diesel bus of the same total passenger capacity. The Greenhouse Gas (GHG) emissions will be expressed in grams of carbon dioxide equivalent measured over a standard test, and will cover “Well-to-Wheel” (WTW) performance, thereby taking into account both the production of the fuel and its consumption on board”.

The principal Greenhouse Gases (GHG) of interest are Carbon Dioxide (CO<sub>2</sub>) Methane (CH<sub>4</sub>) and Nitrous Oxide (N<sub>2</sub>O). The relative “global warming potentials” for these 3 gases are 1:21:310 respectively.

## Low Carbon Technologies

The probable means of producing a Low Carbon Bus is by one of the following, either individually or in combination:

- a) Use of a rechargeable energy storage system (RESS) to augment the primary power produced by an internal combustion engine e.g. diesel-electric hybrid. This may be either charge sustaining or charge depleting.
- b) Electric drive vehicles using a sustainable source of electricity.
- c) Use of fuels that are inherently low in greenhouse gases e.g. Rapeseed Methyl Ester (RME)
- d) Use of fuel cells using sustainable sources of Hydrogen.

## Eligible Vehicles

These guidelines apply to OEM vehicles, OEM approved and warranted conversions, and after-market conversions.

All road-licensed buses complying with Directive 2001/85/EC Classes I and II (from 22 passenger capacity and upwards) may apply for Low Carbon Bus approval.

## Low Carbon Bus Emissions Requirements

The LCVP Bus Working Group has defined the target to be met to achieve Low Carbon Bus status. This is shown in Appendix 2. Target fulfilment must include an objective test of vehicle

performance. The test will be carried out on a whole vehicle chassis dynamometer to determine “Tank-to-Wheel” (TTW) emissions and energy consumption. The gas values of methane and nitrous oxide, if measured, will be converted to carbon dioxide equivalent by applying the weightings given earlier.

The whole vehicle emissions results will be used to calculate the GHG emissions performance of the vehicle on a WTW basis appropriate to the fuel as used in the approval test and as used in service.

“Well-to-Tank” (WTT) emissions and energy consumption will be determined using an appropriate analysis such as those carried out by CONCAWE or by L-B-Systemtechnik GmbH or similar body, subject to approval by the Fuels Working Group of LCVF. The results are expressed in grams of carbon dioxide equivalent per MJ of fuel delivered. Knowing the fuel consumption of a vehicle in MJ/km, the WTT GHG figure can be expressed in g/km.

WTW emissions and energy consumption will be determined from the sum of TTW and WTT performance with greenhouse gas emissions expressed as grams of carbon dioxide equivalent per kilometre and energy consumption expressed as MJ per kilometre. Both measures will be assessed against passenger carrying capacity.

In order to be accredited as a “Low Carbon Bus”, vehicles must have GHG emissions either on the target line, or below that determined for their passenger carrying capacity. The target line will be used to accredit the bus in “worse case” condition i.e. at the minimum payload corresponding to its CO<sub>2</sub> equivalent emissions performance. Buses found to have CO<sub>2</sub> equivalent emissions higher than that corresponding to its passenger capacity will not be afforded Low Carbon Bus status.

To qualify as a Low Carbon Bus, the vehicle must be certified as a PCV and have a Certificate of Fitness. The whole vehicle emissions when tested on an appropriate chassis dynamometer to LCVF Low Carbon Bus test requirements must be reported.

Low Carbon Vehicle status will be conferred on all vehicles similar to those presented for test, as long as the vehicles use similar fuels and energy management strategies

## Whole vehicle testing

The test cycle used will be the Millbrook London Transport Buses (MLTB) cycle based on Route 159 in London. This is described in Appendix 1. In the case of vehicles fitted with internal combustion prime movers, both GHG and air quality emissions (HC, CO, NO<sub>x</sub> and PM) will be determined over the cycle by use of a full-flow constant volume sampling (CVS) system and appropriate analysis equipment. Fuel consumption will be derived from carbon dioxide and other carbon containing emissions by the carbon-balance method. In the case of vehicles fitted with catalysed particulate traps, Selective Catalytic Reduction (SCR) systems, or those powered by lean-burn natural gas engines NO<sub>x</sub> speciation will be carried out by use of Fourier Transfer Infra-red Spectroscopy (FTIR)

The Low Carbon Bus Target Line is shown in Appendix 2. Green House Gas emissions are defined against total passenger capacity by the following linear relationship:

$$\text{CO}_2 \text{ (WTW)} = 7.25 \times \text{total number of passengers} + 480$$

The mass of a passenger is defined as 68 kg.

The mass of the vehicle in running order will be determined by weighing each bus prior to test.

The mass of the vehicle in running order is defined in Directive 97/27/EC as:

**The mass of an unladen vehicle with bodywork, and with coupling device in the case of a towing vehicle, in running order, or the mass of the chassis with cab if the manufacturer does not fit the bodywork and/or coupling device ( including coolant, oils, 90% of fuel, 100% of other liquids except used waters, tools, spare wheel, driver (75kg), and, for buses and coaches, the mass of the crew member (75 kg) if there is a crew seat in the vehicle).**

For the purposes of these guidelines the mass of a bus in running order is defined as:

**The mass of the unladen vehicle with bodywork, in running order, ( including coolant, oils, 90% of fuel, 100% of other liquids except used waters, tools, spare wheel [if carried] and driver (75kg), and the mass of the crew member (75 kg) if there is a crew seat in the vehicle).**

Total passenger capacity will be calculated by subtracting the measured “mass in running order” from the manufacturer’s declared plated gross vehicle weight (GVW) and dividing by 68. Any differences between the calculated passenger capacity and that declared by the bus manufacturer/supplier will be discussed between the technical service carrying out the test and the manufacturer.

The specific test requirements for vehicles will be dependent on the type of powertrain technology employed and is described below

## Test Requirements

### Vehicles fitted with conventional powertrain drivelines

The test requirements are described in Annex A1 – Determination of Energy Consumption and Pollutant Emissions from Low Carbon Buses fitted with Conventional Powertrains.

The test is required, in essence, to be repeated 3 times and an average of the three valid tests presented for accreditation. For the tests to be valid the CO<sub>2</sub> emissions must be within 5% across all three tests.

Annex A1 includes associated appendices as follows:

- Appendix 1: MLTB Drive cycle
- Appendix 2: Well-to-Wheel calculations
- Appendix 3: Passenger capacity vs. Greenhouse Gas Emissions (CO<sub>2</sub> equivalence)
- Appendix 4: Essential characteristics of the vehicle powered by an internal combustion engine only and information concerning the conduct of the test
- Appendix 5: Test report and Approval

## **Vehicles fitted with charge sustaining hybrid powertrain incorporating a rechargeable energy storage system (RESS)**

The test requirements are described in Annex A2 – Determination of Energy Consumption and Pollutant Emissions from Low Carbon Buses fitted with Charge Sustaining Hybrid Powertrains.

For vehicles fitted with hybrid powertrains the state of charge of the RESS may be different at the end of the test cycle to that at the start of the test cycle. This must be considered when determining pollutant emission levels and energy use. If the Net Energy Change (NEC) of the RESS is less than 1% of total energy used over the cycle, then the emissions and energy consumption test results can be used without correction. If the NEC is greater than 1% a method of correction for change in state of charge (SOC) of the RESS during the test must be employed.

Appropriate data i.e. RESS SOC, energy inflow/outflow shall be provided from the vehicle's energy management system on a second-by-second basis during the test. This is analysed to provide a correction for emissions and fuel consumption at an equivalent zero change of SOC. This requires a minimum of three valid tests to be presented. For a test to be valid, the NEC over the drive cycle must be less than 5% of total energy used over the cycle. Tests with NEC of greater than 5% will be considered invalid.

Annex A2 includes associated appendices as follows:

- Appendix 1: MLTB Drive cycle
- Appendix 2: Well-to-Wheel calculations
- Appendix 3: Passenger capacity vs. Greenhouse Gas Emissions (CO<sub>2</sub> equivalence)
- Appendix 4: Essential characteristics of the vehicle powered by a charge sustaining hybrid powertrain and information concerning the conduct of the test
- Appendix 5: Test report and Approval

## **Vehicles fitted with charge depleting hybrid powertrain incorporating a rechargeable energy storage system (RESS)**

The test requirements are described in Annex A3 – Determination of Energy Consumption and Pollutant Emissions from Low Carbon Buses fitted with Charge Depleting Hybrid Powertrains.

Tailpipe mass emissions from charge-depleting hybrid vehicles are likely to be less than those of charge-sustaining hybrid vehicles because charge-depleting hybrid vehicles draw down the stored energy of the RESS, which means less energy is provided by the prime mover. Therefore, to provide a true accounting of the emissions and fuel economy of the vehicle, emissions and energy associated with consumed electricity generation for the RESS must be accounted for.

After conducting a test run, the energy required (kilowatt-hours) to recharge the RESS to the SOC at the beginning of the test run must be measured at the wall meter upstream from the vehicle charger. The energy consumed is then divided by the total distance traveled by the vehicle over the test run as noted by the dynamometer or the target cycle distance, whichever is lower. The resulting energy input (kilowatt-hours per kilometre) is then assigned a CO<sub>2</sub> generation value determined from the generation mix appropriate to the supply. This generation value will be added to the CO<sub>2</sub> results determined directly from the vehicle test.

The test is required, in essence, to be repeated 3 times and an average of the three valid tests presented for accreditation. For the tests to be valid the total CO<sub>2</sub> emissions must be within 5% across all three tests.

Annex A3 includes associated appendices as follows:

- Appendix 1: MLTB Drive cycle
- Appendix 2: Well-to-Wheel calculations
- Appendix 3: Passenger capacity vs. Greenhouse Gas Emissions (CO<sub>2</sub> equivalence)
- Appendix 4: Essential characteristics of the vehicle powered by a charge depleting hybrid powertrain and information concerning the conduct of the test
- Appendix 5: Test report and Approval

### **Vehicles fitted with pure electric drivelines**

The test requirements are described in Annex A4 – Determination of Energy Performance of Low Carbon Buses fitted with Pure Electric Drivelines.

Starting from a known RESS SOC (normally 100% of standard operating SOC), the vehicle is driven over two complete drive cycles. After conducting a test run, the energy required (kilowatt-hours) to recharge the RESS to the SOC at the beginning of the test run must be measured at the wall meter upstream from the vehicle charger. The energy consumed is then divided by the total distance travelled by the vehicle over the test run as noted by the dynamometer or the target cycle distance, whichever is lower. The resulting energy input (kilowatt-hours per kilometre) is then assigned a CO<sub>2</sub> generation value determined from the generation mix appropriate to the supply.

Annex A4 includes associated appendices as follows:

- Appendix 1: MLTB Drive cycle
- Appendix 2: Well-to-Wheel calculations
- Appendix 3: Passenger capacity vs. Greenhouse Gas Emissions (CO<sub>2</sub> equivalence)
- Appendix 4: Essential characteristics of the vehicle powered by a pure electric powertrain and information concerning the conduct of the test
- Appendix 5: Test report and Approval

### **Additional/optional drive cycles**

Whilst the MLTB test cycle is considered as a suitable test for the purposes of “benchmarking” and Low Carbon Accreditation, future vehicles and their drivelines may be designed around specific operating cycles. It is known that choice of drive cycle can have a significant effect on both the emissions and the fuel efficiency of hybrid vehicles and therefore the option of testing to alternative drive cycles may be considered as an additional, optional phase of the test. This issue will be discussed with the Low Carbon technology provider and the test cycle will be defined prior to any test work.

### **Eligible Test Centres**

Performance and emissions testing of Low Carbon Buses must be carried out by a vehicle testing agency that is acceptable to the Type Approval Authority of an EU Member State.

## **Test Fuel**

### **Composition**

Emissions tests for vehicles running on conventional diesel will use commercial low-sulphur, ultra-low sulphur or sulphur-free diesel complying with BS EN590 2000.

Emissions tests for vehicles running on natural gas must use “Reference Fuel G25” as defined in Annex IX of Directive 98/69/EC.

Emissions tests for vehicles running on LPG must use “Reference Fuel B” as defined in Annex IX of Directive 98/69/EC.

For vehicles running on bio-diesel or other “alternative fuels”, the fuel specification and composition will be declared prior to the test. In order to determine Well-to-Tank GHG emissions, the fuel pathway must be known and the appropriate GHG value agreed for the method of extraction/production.

### **Fuel sampling**

A sample of the test fuel will be obtained from the vehicle immediately prior to testing on the chassis dynamometer

### **Accreditation**

Information contained within Appendices 4 and 5 of the test procedure appropriate the type of powertrain employed will be presented for accreditation.

### **Right of Suspension and/or Termination**

LCVP reserves the right to suspend for such period as it thinks fit, or terminate, the Vehicle Approval status of any product (and having done so, to remove the product in question from the Low Carbon Bus Register) by sending notice in writing to the relevant Company at any time if any of the information provided by or on behalf of the Company in support of its application for Vehicle Approval status is found to be inaccurate or untrue


## Appendix 1 – MILLBROOK LONDON TRANSPORT BUS (MLTB) DRIVE-CYCLE

This test cycle was specifically developed for use with buses and was derived from data logged from a bus in service within inner London.

The drive cycle consists of two phases, a medium speed 'Outer London' phase simulating a journey from Brixton Station to Trafalgar Square and a low speed 'Inner London' phase simulating a journey from Trafalgar Square to the end of Oxford Street.

The cycle is composed of two phases:

- (1) Outer London Phase, nominal distance 6.45 km, 1,380 seconds in duration
- (2) Inner London Phase, nominal distance 2.47 km, 901 seconds duration

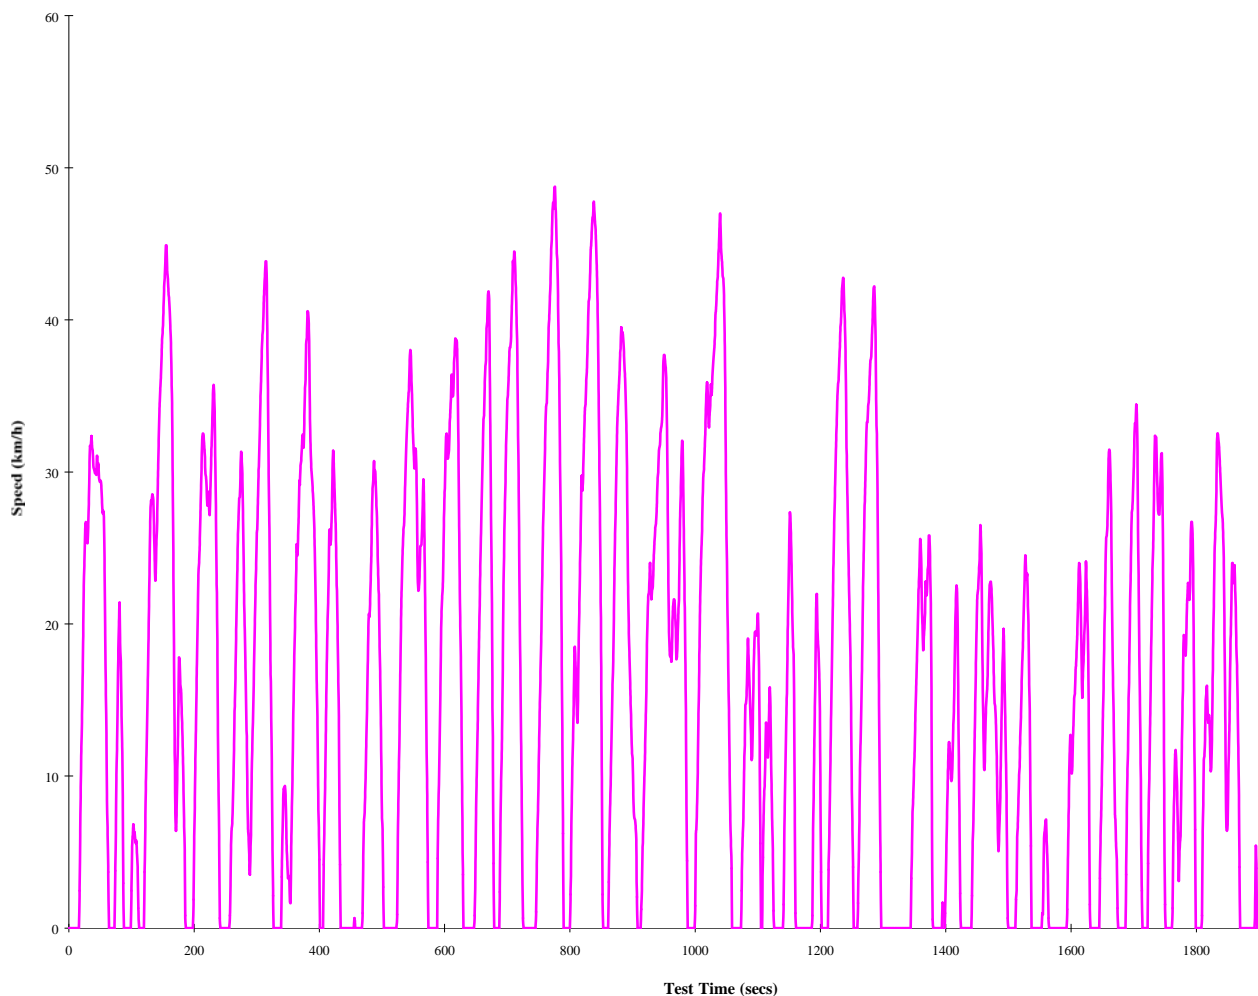


### General information

The overall length of the test is 2,281 seconds and the nominal distance covered is 8.92 km.

Test cell ambient temperature for duration of test =  $18^{\circ}\text{C} \pm 2^{\circ}\text{C}$

## Appendix 2 - Low Carbon Bus CO2 emissions target line

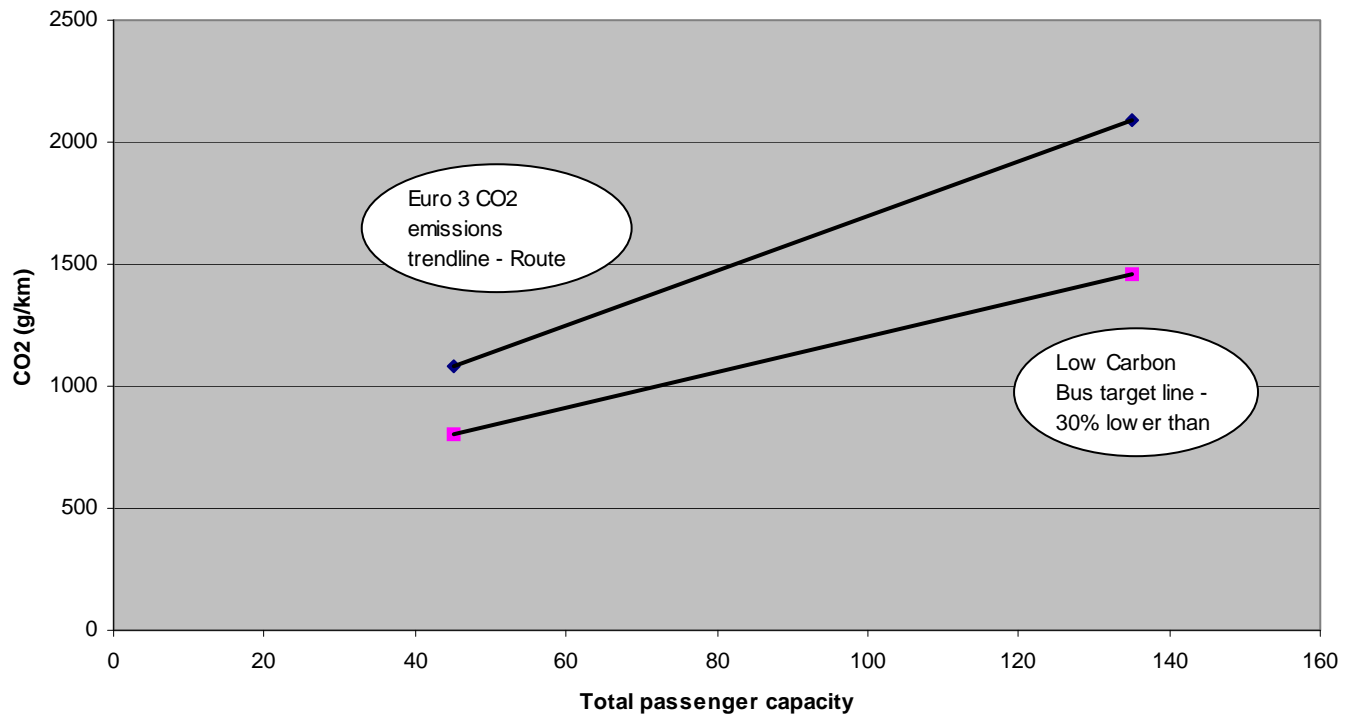

## **BWG-P-05-05**

# **Annex A2: Test Procedure for Measuring Fuel Economy and Emissions of Low Carbon Buses powered by Charge Sustaining Hybrid Powertrain**

## TABLE OF CONTENTS

1	Scope
2	Definitions and Terminology
3	State of Charge – Charge-Sustaining Hybrid Vehicles
3.1	SOC Terminology
3.2	Net Energy Change (NEC)
3.3	Determining NEC Variance
3.4	Determination Procedure
3.5	SOC Correction Procedure
3.5	SOC Correction Procedure
3.6	SOC Correction Example
4.	State of Charge – Charge-Sustaining Hybrid-Electric Vehicles
4.1	Test Site
4.2	Pre-Test Data Collection
4.3	Operation of the vehicle
4.4	Condition of the Vehicle
4.5	Conditioning of Rechargeable Energy Storage System
4.6	Dynamometer Specifications
4.7	Dynamometer Calibrations
4.8	Inertial Load
4.9	Road Load
4.10	Dynamometer Load Coefficient Determination
4.11	Dynamometer Settings
4.12	Test Instrumentation
5.	Test Preparations
5.1	Vehicle Propulsion System Starting and Restarting
5.2	Dynamometer Driving Procedure
5.3	Dynamometer Warm-up
5.4	Practice and Warm Up Runs
5.5	Emission Tests
5.6	Test Termination
5.7	Air Conditioning
5.8	Data Recording
5.9	State of Charge
6.	Test Validation
7.	Reporting
Appendix 1: Millbrook London Transport Bus (MLBT) Drive Cycle	
Appendix 2: Well-to-Wheel calculations	
Appendix 3: Passenger capacity vs. Greenhouse Gas (CO <sub>2</sub> equivalence)	
Appendix 4: Essential Characteristics of the Vehicle powered by a Charge Sustaining Hybrid Power Train	
Appendix 5: Test Report and Approval	

## 1. Scope

This document provides an accurate and reproducible procedure for simulating the operation of buses powered by charge sustaining hybrid-electric powertrain on dynamometers for the purpose of measuring emissions and fuel economy.

This procedure defines a hybrid vehicle as having both a rechargeable energy storage system (RESS) capable of releasing and capturing energy and an energy-generating device that converts consumable fuels into propulsion energy. RESS specifically included in the test procedure are batteries, capacitors and flywheels, although other RESS can be evaluated utilizing the guidelines provided in the document. Further, the procedure provides a detailed description of state of charge (SOC) correction for charge-sustaining HEVs. It should be noted that most buses addressed in this recommended practice would be powered by engines that are certified separately for emissions. The engine certification procedure appears in Regulation 77/88/EC.

This test procedure does not make specific provisions or recommendations for testing of bus emissions with air conditioning deployed because the complexity of such tests is significant. It is recognized that a future procedure that addresses air conditioning and other potentially large auxiliary loads is needed.

Testing shall not require defeating or otherwise forcing a vehicle's control system to perform differently from the way in which it would perform in use (potential exceptions include antilock brakes, traction control and other systems that may affect dynamometer testing).

The procedure requires the calculation of Well-to-Wheel (WTW) Greenhouse Gas (GHG) Emissions to determine if the vehicle qualifies as a Low Carbon Bus.

The vehicle shall be operated over the Millbrook London Transport Bus (MLTB) drive cycle representing intermediate-speed bus operation in London. Details of this cycle can be found in Appendix 1 of this document.

Regulated emissions (HC, CO, NO<sub>x</sub> and PM) and carbon dioxide shall be sampled over the entire cycle and the results presented as gms/km.

For buses powered by lean-burn engines and those equipped with catalysed particulate traps, the concentration of Nitrous Oxide (N<sub>2</sub>O) shall be determined using Fourier Transfer Infra-Red spectroscopy (FTIR) techniques.

For vehicles powered by engines fuelled with compressed natural gas (CNG), the concentration of methane (CH<sub>4</sub>) shall be determined by separate analysis.

## 2. Definitions and Terminology

**BATTERY** -- A device that stores chemical energy and releases electrical energy.

**BATTERY C/3 CURRENT RATE** -- The constant current (Ampere-hours) at which the battery can be discharged from its rated Ampere-hour capacity in three hours to its manufacturer's recommended minimum. Battery manufacturers typically provide ratings from C/1 to C/6. These ratings have no direct impact on this recommended practice.

**BATTERY DEPTH OF DISCHARGE (DOD)** -- The percentage of rated capacity to which a cell/battery is discharged. State of charge (SOC) % + DOD% = 100%.

**BATTERY RATED AMPERE-HOUR CAPACITY** -- The manufacturer-rated capacity of a battery in Ampere-hours obtained from a battery discharged at the manufacturer's recommended discharge rate (C/1 - C/6) such that a specified minimum cut-off terminal voltage is reached.

**BATTERY STATE OF CHARGE (SOC)** -- Based on the actual measured energy content of a battery and expressed as a percentage of the battery's maximum rated Ampere hour (Ah) capacity.

**CAPACITOR** -- A device that stores energy electrostatically and releases electrical energy.

**CAPACITOR STATE OF CHARGE (SOC)** -- Based on the actual measured energy content of a capacitor and expressed as a percentage of the capacitor's maximum rated voltage squared ( $V^2$ ).

**CHARGE-SUSTAINING HEV** -- The charge-sustaining HEV derives all of its energy from on board fuel under normal usage. Over a short period of time charge-sustaining hybrid-electric vehicles may be either charge depleting or charge increasing. The definition means that that in the long term (24 hours) a RESS charge is sustained. The procedure includes provisions for calculating SOC corrections in the short term that reflect emissions from the vehicle as if it was charge sustaining in the short term.

**CONSUMABLE FUEL** -- Any solid, liquid, or gaseous material that releases energy and is depleted as a result.

**ELECTROMECHANICAL FLYWHEEL** -- A device that stores rotational kinetic energy and can release that kinetic energy to an electric motor-generator system, thereby producing electrical energy.

**ELECTROMECHANICAL FLYWHEEL STATE OF CHARGE (SOC)** -- Based on the actual measured energy content of an electromechanical flywheel and expressed as a percentage of the flywheel's maximum-rated revolutions per minute squared ( $\text{rpm}^2$ ).

**HYBRID-ELECTRIC VEHICLE (HEV)** -- A road vehicle that can draw propulsion energy from both of the following on-vehicle sources of stored energy: 1) one consumable fuel and 2) one RESS that is recharged by an on-board electric generating system and/or an off-board charging system or power supply.

**NET ENERGY CHANGE (NEC)** -- The net change in energy level of an RESS expressed in Joules (watt-seconds)

**PRIME MOVER** – Power unit which provides the primary source of mechanical energy used to move the vehicle

**PROPULSION ENERGY** -- Energy that is derived from the vehicle's consumable fuel and/or rechargeable energy storage system to drive the wheels. If an energy source is supplying energy only to vehicle accessories (e.g., a 12-volt battery on a conventional vehicle), it is not acting as a source of propulsion energy.

**PROPULSION SYSTEM** -- A system that, when started, provides propulsion for the vehicle in an amount proportional to what the driver commands.

**REGENERATIVE BRAKING** -- Deceleration of the vehicle caused by operating an electric motor-generator system, thereby returning energy to the vehicle propulsion system and providing charge to the RESS or to operate on-board auxiliaries.

**RECHARGEABLE ENERGY STORAGE SYSTEM (RESS)** -- A component or system of components that stores energy and for which its supply of energy is rechargeable by an electric motor-generator system, an off-vehicle electric energy source, or both. Examples of RESS for HEVs include batteries, capacitors, and electromechanical flywheels.

**STATE OF CHARGE** – see “Battery state of charge”

**TOTAL FUEL ENERGY** -- The total energy content of the fuel in MJ consumed during a test as determined by carbon balance or other acceptable method and calculated based on the lower heating value of the fuel.

### **3. State of Charge – Charge-Sustaining Hybrid Vehicles**

When a conventional vehicle completes a chassis test, the energy provided by the combustion engine is equal to the total energy necessary to complete the cycle, and this value is consistent from test run to test run. There is no energy storage on board the vehicle other than consumable fuel, and no need for state of charge (SOC) correction.

However, in a Hybrid Electric Vehicle (HEV), for example, a significant amount of motive energy is stored on board the vehicle within the RESS, and the vehicle may remove or add energy to this energy reservoir during a relatively short period of time. In order to compare the emission results of an HEV to a conventional vehicle, the data from the HEV must be corrected so that the net change in RESS energy is essentially zero (i.e., all of the energy and emissions are essentially provided by the Prime Mover).

This procedure allows for some level of tolerance between the initial SOC and final SOC to avoid correcting data that is already effectively at a net zero change in energy level. A determination of  $\pm 1\%$  or less net change in stored energy when compared to total cycle energy expended is within tolerance levels and does not require SOC correction calculations in determining fuel economy and emissions. If the percent change in net energy change (NEC) is greater than  $\pm 1\%$  but less than  $\pm 5\%$ , this procedure allows for correction of emissions and fuel economy calculations to account for the change in energy storage if a clear relationship between NEC and emissions and fuel economy can be established. This procedure is outlined below in Sect. 3.4. If the vehicle has a NEC greater than 5%, the collected data may not be reliably corrected and the test should be considered invalid.

### 3.1 SOC Terminology

The SOC of a battery, capacitor and electromechanical flywheel is defined in section 3. The following terms are used to distinguish the two different values of SOC in the test procedure.

SOC <sub>initial</sub> :	SOC at the beginning of the test run (Ah, V <sup>2</sup> or rpm <sup>2</sup> )
SOC <sub>final</sub> :	SOC at the end of the test run (Ah, V <sup>2</sup> or rpm <sup>2</sup> )
SOC <sub>delta</sub>	Delta ampere-hours measured during a test

NEC calculations are presented in Joules (watt-seconds).

### 3.2 Net Energy Change (NEC)

Provision must be made for recording the RESS SOC at the start and stop of each test run, although in practice this is not always achievable. It is therefore essential that second by second logging of energy flows in and out of the RESS be carried out for the duration of each test run. For each different test cycle a minimum of three test runs must be performed to provide sufficient data for a SOC correction, if needed. It is also desirable that at least one test run have a net positive and another a net negative NEC value so that net SOC calculations are based on interpolation and not extrapolation. Since different types of RESS store energy differently, each type of RESS will use different equations to define NEC. The following section gives the NEC calculations for batteries, capacitors and electro-mechanical flywheels.

#### BATTERIES

Equations 1(a) and 1(b) calculate the NEC for batteries.

$$\text{NEC} = [\text{SOC}_{\text{final}} - \text{SOC}_{\text{initial}}] * V_{\text{system}} * K_1 \quad (\text{Equation 1a})$$

where:

SOC =	Battery SOC at the beginning and end of the test run, in Ampere-hours (Ah). (Note: If the SOC <sub>final</sub> and SOC <sub>initial</sub> values are in amp-seconds, the conversion factor is not used.)
V <sub>system</sub> =	Battery's DC nominal system voltage as specified by the manufacturer, in volts (V)
K <sub>1</sub> =	Conversion factor = 3600 (seconds/hour) (not used if SOC <sub>final</sub> and SOC <sub>initial</sub> values are in seconds)

or,

$$\text{NEC} = [\text{SOC}_{\text{delta}}] * V_{\text{system}} * K_1 \quad (\text{Equation 1b})$$

where:

SOC <sub>delta</sub> =	Delta ampere-hours during a test
V <sub>system</sub> =	Battery's DC nominal system voltage as specified by the manufacturer, in volts (V)
K <sub>1</sub> =	Conversion factor = 3600 (seconds/hour) (not used if SOC <sub>final</sub> and SOC <sub>initial</sub> values are in seconds)

## CAPACITORS

Equation 2 calculates NEC for capacitors.

$$NEC = (C/2) * [SOC_{final} - SOC_{initial}] \quad (Equation 2)$$

where:

$$SOC = \text{The capacitor SOC at the beginning and end of the test run, in } (V)^2$$

$$C = \text{Rated capacitance of the capacitor as specified by the manufacturer, in Farads (F)}$$

## ELECTROMECHANICAL FLYWHEELS

Equation 3 calculates NEC for electromechanical flywheels.

$$NEC = (1/2) * I * [SOC_{final} - SOC_{initial}] * K_2 \quad (Equation 3)$$

where:

$$SOC = \text{Flywheel state-of-charge at the beginning and end of the test run, in } (rpm)^2$$

$$I = \text{Rated moment of inertia of the flywheel system, in kilogram-meter}^2 \text{ (kg/m}^2\text{)}$$

$$K_2 = \text{Conversion factor} = 4\pi^2/3600 \text{ (rad}^2\text{/sec}^2\text{/rpm}^2\text{)}$$

### 3.3 Determining NEC Variance

## TOTAL CYCLE ENERGY

This procedure uses total cycle energy to determine NEC tolerances, as opposed to total fuel energy, which can vary from test run to test run. To remain consistent with the calculations for NEC, either the total cycle energy must be reported in watt-seconds or the NEC must be converted to kWh.

$$\text{Total Cycle Energy} = \text{Total Fuel Energy} - NEC \quad (Equation 4)$$

Total fuel energy is the energy value of the fuel consumed by the APU during the test and is calculated as shown in equation 5.

$$\text{Total Fuel Energy} = NHV_{fuel} * m_{fuel} \quad (Equation 5)$$

where

$$NHV_{fuel} = \text{Net heating value in Joules per kilogram (J/kg)}$$

$$m_{fuel} = \text{Total mass of fuel consumed over test, in kilograms (kg)}$$

### 3.4 Determination Procedure

To determine if a test run has an acceptable NEC that does not require SOC correction, divide NEC by total cycle energy. If the absolute value of the calculation yields a number less than or equal to 1%, as shown in equation 6, the NEC variance is within tolerance levels and the emissions and fuel economy values for that test run do not

need to be corrected for SOC.

$$\left| \frac{\text{NEC}}{\text{total cycle energy}} \right| * 100\% \leq 1\% \quad (\text{Equation 6})$$

If the absolute value of the calculation yields a number greater 1%, but less than or equal to 5%, as shown in equation 7, emissions and fuel economy values from the test run need to be corrected for SOC as described below. Test runs with NEC variance greater than  $\pm 5\%$  are considered invalid or, if the vehicle is consistently charge depleting, may have to be tested under the charge-depleting vehicle recommendations.

$$1\% < \left| \frac{\text{NEC}}{\text{total cycle energy}} \right| * 100\% \leq 5\% \quad (\text{Equation 7})$$

### 3.5 SOC Correction Procedure

In order to compute a state of charge correction for each emissions species and for fuel economy, the emission and fuel economy values for each run must be plotted against the NEC for each run. A linear interpolation (in some cases extrapolation may be allowed) is performed to establish the fuel economy or emissions at a NEC of zero (i.e., the data is corrected to reflect a net zero change in SOC).

### 3.6 SOC Correction Example

A worked example from a test on a diesel electric series hybrid bus is provided in Appendix 2. This shows the correction factor applied due to variations in net energy change and calculates CO<sub>2</sub> emissions on a Well-to-Wheel basis.

#### ACCURACY COMBINED WITH SOC CORRECTION

On a hybrid vehicle, NEC values approaching 5% of the total cycle energy can result in emission data that can vary significantly from data with a NEC of effectively zero. This is because the vehicle was propelled by energy that is not accounted for. The only way to determine acceptable variance is to correct the data first using the SOC correction procedure. Because using the SOC correction procedure effectively turns multiple test values into a single value, the coefficient of determination,  $R^2$ , of the linear best fit is used to determine whether the collected data is valid. For the purposes of this test procedure the data is considered acceptable if the  $R^2$ , which compares the predicted and actual values of the linear regression, is equal to or greater than 0.80.

## 4. Test Preparations

### 4.1 Test Site

The ambient temperature levels encountered by the test vehicle shall be maintained throughout the test at  $18^\circ\text{C} \pm 2^\circ\text{C}$

Ambient temperatures must be recorded at the beginning and end of the test period. Test conditions specified in 70/220/EEC and 77/88/EEC shall apply, where appropriate.

Adequate test site capabilities for safe venting and cooling of batteries, containment of flywheels, protection from exposure to high voltage, or any other necessary safety

precaution shall be provided during testing.

A fixed-speed-cooling fan shall direct cooling air to the vehicle to maintain the engine operating temperature as specified by the manufacturer during testing. These fans shall only be operating when the vehicle is in operation and shall be switched off for all key off dwell periods. Fans for brake cooling can be utilized at all times.

## **4.2 Pre-Test Data Collection**

Prior to testing, detailed characteristics of the vehicle should be recorded. These requirements are specified in Appendix 1 of this Annex. The chassis test laboratory will be used to measure actual cycle distance during a test, as it is generally considered a more accurate method of calculation; as a result, an odometer on the vehicle is not required.

If fuel properties are not known, a fuel sample should be gathered for subsequent analysis. Fuel properties to be determined and reported should include as a minimum:

- for liquid compression ignition fuels: the heating value, sulfur content and aromatic density
- for natural gas: the methane content, non-methane organic content and inert content;
- for liquid spark ignition fuels: heating value and octane number

## **4.3 Operation of the vehicle**

Deviation from the basic procedure, such as testing the vehicle in an unconventional mode, must be properly documented for later reproduction.

## **4.4 Condition of the Vehicle**

Vehicle Stabilization -- Prior to testing, the vehicle shall be stabilized to a distance.. agreed with the manufacturer.

Vehicle Appendages -- Vehicles shall be tested with normal appendages (mirrors, bumpers, etc.). Certain items (e.g., hub caps) may be removed where necessary for safety on the dynamometer.

Vehicle Test Weight -- Buses shall be tested at curb weight plus driver weight and one half total passenger load using a weight of 68 kg per passenger. The curb weight of the vehicle shall be determined prior to test by the technical service carrying out the test.

Tyres -- Manufacturer's recommended tyres shall be used and shall be the same size as would be used in service.

Tyre Pressure -- For dynamometer testing, tyre pressures should be set at the beginning of the test to manufacturer's recommended pressure.

Lubricants -- The vehicle lubricants normally specified by the manufacturer shall be used.

**Gear Shifting** – The vehicle shall be driven with appropriate accelerator pedal movement to achieve the time versus speed relationship prescribed by the driving cycle. Both smoothing of speed variations and excessive acceleration pedal perturbations are to be avoided and may cause invalidation of the test run. In the case of test vehicles equipped with manual transmissions, the transmission shall be shifted in accordance with procedures that are representative of shift patterns that may reasonably be expected to be followed by vehicles in use.

**Air Suspension** – All vehicles with air suspensions shall be aired up from an external source prior to testing. After the vehicle has reached sufficient air pressure to achieve proper suspension levelling and service brake operation, external air shall be disconnected from the vehicle and shall not be reconnected during actual emission testing. External air should only be utilized prior to the first test and should not be utilized between testing events during the key off period

**Vehicle Preparation & Preconditioning** -- Preconditioning, at a minimum, should include:

- The vehicle should be preconditioned using a complete run of the test cycle followed by the appropriate key off dwell period (see Appendix1)
- Initial SOC setting

#### **4.5 Conditioning of Rechargeable Energy Storage System**

**Off-Vehicle Charging** – The RESS is not required to be fully charged at the start of tests. Tests may be carried out on the vehicles with the SOC between the normal maximum and minimum operating SOC as defined by the manufacturer. Off-vehicle charging is only allowed for the battery conditioning of charge-sustaining HEVs.

**RESS Failure** -- In the event that the RESS is damaged or has an energy storage capability below the manufacturer's specified rating, the RESS shall be repaired or replaced and stabilized, and then the test procedure should be repeated. Data from tests with a faulty RESS shall be considered invalid.

#### **4.6 Dynamometer Specifications**

The evaluation of the emissions and fuel economy from a low carbon bus powered by hybrid powertrain should be performed using a laboratory that incorporates a chassis dynamometer, a full-scale dilution tunnel, and laboratory-grade exhaust gas analyzers as described in 70/220/EEC (Light-duty vehicles) and 88/77/EC (Heavy-duty engines). The chassis dynamometer should be capable of simulating the transient inertial load, aerodynamic drag and rolling resistance associated with normal operations of the vehicle. The transient inertial load should be simulated using appropriately sized flywheels and/or electronically controlled power absorbers. The aerodynamic drag and rolling resistance may be implemented by power absorbers with an appropriate computer control system. The drag and rolling resistance should be established as a function of vehicle speed. The actual vehicle weight for the on-road coast down should be the same as the anticipated vehicle testing weight as simulated on the dynamometer. The vehicle should be mounted on the chassis dynamometer so that it can be driven through a test cycle. The driver should be provided with a visual display of the desired and actual vehicle speed to allow the driver to operate the vehicle on the prescribed cycle.

#### **4.7 Dynamometer Calibrations**

The dynamometer laboratory should provide its calibration procedures as recommended by the manufacturer.

#### **4.8 Inertial Load**

Inertial load needs to be simulated correctly from a complete stop (e.g., total energy used to accelerate the vehicle plus road and aerodynamic losses should equal theoretical calculations and actual coastdowns). For HEVs this may be determined by measuring the power delivered to the dynamometer at the drive motors.

#### **4.9 Road Load**

Road load and wind losses should be simulated by an energy device such as a power absorber. Road load should be verified by comparison to previously tested vehicles having similar characteristics or by coastdown analysis on the track.

#### **4.10 Dynamometer Load Coefficient Determination**

The dynamometer coefficients that simulate road-load forces shall be determined as specified in Directive 70/220/EEC, with the following provisions:

- a) Vehicles equipped with regenerative braking systems that are actuated only by the brake pedal shall require no special actions for coastdown testing on both the test track and dynamometer.
- b) Vehicles equipped with regenerative braking systems that are activated at least in part when the brake pedal is not depressed shall have regenerative braking disabled during the deceleration portion of coastdown testing on both the test track and dynamometer, preferably through temporary software changes in the vehicle's control system. Mechanical changes to the vehicle to deactivate regenerative braking (such as completely removing the drive shaft) are discouraged. However, if this practice becomes necessary as a last resort, every safety precaution shall be taken during vehicle operation, and the same mechanical modifications shall occur on both the test track and dynamometer. Methods to accelerate a vehicle without a drive shaft on both the test track and the dynamometer shall be determined by the manufacturer. However, pushing the vehicle with another vehicle is not an option.
- c) The vehicles shall be weighted to the correct dynamometer test weight when the on road coastdowns are performed.

#### **4.11 Dynamometer Settings**

The dynamometer's power absorption and inertia simulation shall be set as specified in 70/220/EEC. It is preferable to insure that the dynamometer system provides the appropriate retarding force at all speeds, rather than simply satisfying a coastdown time between two specified speeds. The remaining operating conditions of the vehicle should be set to the same operating mode during coastdowns on road and on the dynamometer (e.g., air conditioning off, etc).

#### **4.12 Test Instrumentation**

Equipment referenced in 70/220/EEC and 88/77/EC (including exhaust emissions sampling and analytical systems) is required for emissions measurements, where appropriate. All instrumentation shall be traceable to national standards.

The following instruments are likely to be required for determination of change of SOC on an as-needed usage.

- DC wideband Ampere-hour meter: Any Ampere-hour meter using an integration technique shall have an integration frequency of up to 1hz seconds so that abrupt changes of current can be accommodated without introducing significant integration errors.
- An instrument to measure a capacitor's voltage
- An instrument to measure an electromechanical flywheel's rotational speed
- AC Watt-hour meter to measure AC Recharge Energy
- A voltmeter and ammeter for as-needed usage

## **5. Test Procedure**

### **5.1 Vehicle Propulsion System Starting and Restarting**

The vehicle's propulsion system – specifically, the unit that provides the primary motive energy, e.g., the internal combustion engine -- shall be started according to the manufacturer's recommended starting procedures in the owner's manual. Only equipment necessary to the primary propulsion of the vehicle during normal service shall be operated. The air conditioner and other auxiliary on-board equipment not generally used during normal service shall be disabled during testing.

### **5.2 Dynamometer Driving Procedure**

The emission test sequence starts with a "hot" vehicle that can be utilized to warm the dynamometer to operating temperature and allow for vehicle rolling loss calibration.

### **5.3 Dynamometer Warm-up**

Because many dynamometers require that the vehicle be partially supported to accurately reflect rolling losses, the test vehicle is used to warm the dynamometer and operated to allow for proper laboratory and vehicle loss calibrations. Unrecoverable rolling and aerodynamic losses should be determined using a suitable coast down or several steady state speed tests.

### **5.4 Practice and Warm Up Runs**

The test vehicle will be operated through a preliminary run of the desired test cycle. During this preliminary cycle, the driver will become familiar with the vehicle operation, and the suitability of the selected operating range of gas analyzers will be verified. Additional preliminary runs will be made, if necessary, to assure that the vehicle, driver, and laboratory instrumentation are performing satisfactorily. Once the vehicle has reached operating temperature the vehicle shall be returned to the "key off" condition in anticipation of the subsequent emission test cycle.

### **5.5 Emission Tests**

The emission test cycle shall consider all emission data from the moment the vehicle is started, excluding the actual start event. The vehicle shall be started and warmed to operating temperature utilizing the same test cycle that will be used for emission characterization. Once the vehicle is at operating temperature the vehicle shall be turned off and will be restarted within 30 minutes. The test cycle shall begin and

emission measurements will be taken. At the end of the test cycle the vehicle shall be returned to the “key off” condition. Analysis will be carried out between test cycles

The number of tests runs performed must be sufficient to provide a minimum of three test runs with valid results i.e  $NEC < 5\%$  total cycle energy used. If the test sequence lapses in timing, another preliminary warm up run must be performed, after which the schedule can be resumed. Valid data gained prior to the breaking of the schedule may be preserved and reported. It is important to adhere to the time schedule and soak periods because engines and aftertreatment devices are sensitive to operating temperature.

## **5.6 Test Termination**

The test shall terminate at the conclusion of the test run. However, sufficient idle time should be included at the end of a run, such that the analyzers are not missing emissions that are still in the sampling train.

## **5.7 Air Conditioning**

Emissions from air conditioning systems is outside of the scope of this procedure. Air conditioning and conventional heating systems will therefore be switched off for the duration of the test

## **5.8 Data Recording**

The emissions from the vehicle exhaust will be ducted to a full-scale dilution tunnel where the gaseous emissions of carbon monoxide, oxides of nitrogen (both nitric oxide and nitrogen dioxide) and carbon dioxide will be analysed as an integrated bag sample. Emissions of hydrocarbons shall be measured on a continuous basis at a frequency of 5 Hz or greater. It is recommended that emissions of carbon monoxide, oxides of nitrogen and carbon dioxide are also measured on a continuous basis, and that these levels be compared to the integrated bag measurements for carbon monoxide and carbon dioxide as a quality assurance check. Particulate matter will be measured gravimetrically using fluorocarbon-coated glass fiber filters by weighing the filters before and after testing. Filters will be conditioned to temperature and humidity conditions as specified by 88/77/EEC

For each constituent, a background sample using the same sampling train as used during the actual testing must be measured before and after the emission test, and the background correction must be performed as specified by 70/220/EEC. For a compressed natural gas-fueled vehicle, and in cases where methane and non-methane hydrocarbons are species of interest, the integrated methane and non-methane content of hydrocarbons will also be measured, using gas chromatography analysis of integrated bag samples for each run. In cases where some specialty fuels are examined by the test procedure, it may prove necessary to sample for additional species, including alcohols, aldehydes, ketones, or organic toxics if it suspected that for these fuels the levels of these additional species might be significantly higher than is normally found for diesel fuel. It is recommended that the tunnel inlet be filtered for PM with a HEPA filter to aid in lowering the detection limits.

Fuel consumed shall typically be determined by carbon balance from the analytical analyzers, and the actual distance traveled by the dynamometer roll surface shall determine the actual distance travelled during the driving cycles. Alternative methods for fuel consumption, such as direct mass measurement of the fuel tank, shall be considered if they are sufficiently accurate. This would require that the mass measurement system have an accuracy of greater than 1% of the fuel amount

consumed during the test cycle. This method would be required for vehicles consuming hydrogen fuel. Mass measurement is preferred to volumetric measurement.

## 5.9 State of Charge

SOC of the vehicle shall be measured continuously (at a rate of 1Hz or greater) and recorded throughout the entire test. Recorded data must then be time integrated against the emission measurement data at the beginning and end to coincide with the emission measurement portion of the chassis test. Provided the SOC is measured, time sequenced and integrated according to the procedures listed earlier in this document, only the actual beginning and ending SOC values are necessary in the final test report. Alternatively the SOC of the RESS may be recorded at the beginning and end of the test. It is recommended that both Ah and system voltage be recorded during the test as outlined in the method for determining NEC.

## 6. Test Validation

The value of the mass emission rates for each species will be averaged. There will be a minimum of three valid runs for each type of drive cycle. The coefficient of variance will be determined for each species. If the coefficient of variance is poor, additional runs should be performed until acceptable repeatability of emissions values are obtained. For hybrid vehicles the SOC correction is conducted first, and the  $R^2$  of the linear best fit must be greater than 0.8. If a hybrid vehicle has three valid runs with less than the 1% NEC delta, then the data can be treated the same as a conventional vehicle. Under these circumstances, the  $R^2$  of the best fit would be poor since all data points are essentially on the same axis (0% SOC correction). However, there still exists the possibility of laboratory related failures that need quality assurance, such as the loss of a sampling pump or analyzer drift that may result in three 0% SOC runs with emission differences of greater than 5%. Any obvious error in the data should be identified and removed from the dataset; however, a minimum of three successful runs should be used in reporting the data.

At the end of each run, the total distance travelled by the vehicle over the test run will be noted from the dynamometer distance measurements. Adherence of the driver to the test cycle target speeds will be noted, and a regression will be performed to compare actual speeds with target speeds on a second-by-second basis. Target speed (x) and actual speed (y) should be charted in 1Hz increments and a trend line inserted with a zero intercept. If the resulting trend line has a slope that varies from unity by more than 10% or an  $R^2$  of less than 0.8 the test run should be considered an invalid representation of that test cycle. The lower of the actual distance travelled or the target cycle distance should be used for the test cycle distance value.

If at any point during the test, vehicle propulsion is not possible or the driver is warned by the vehicle to discontinue driving because the RESS energy supply is too low, the test is considered invalid. The RESS should be recharged and the testing procedure restarted from the beginning of the interrupted test run.

## 7. Reporting

The final test report shall include all measured parameters including vehicle configuration, vehicle statistics, test cycle, measured parameters and calculated test results. See Appendix 5.

The following information will be included in the report:

**Exhaust Emissions and Fuel Economy** - The exhaust emissions and fuel economy of the vehicle shall be measured during each test phase in which such measurements are required. The measurements shall be reported in grams per kilometre and litres per 100 kilometre, respectively. Total fuel energy shall be reported in MJ.

**Actual Distance Travelled** - The actual distance that the dynamometer roll surface traveled shall be measured during each test phase in which such measurements are required.

**SOC Difference and NEC** - The state of charge difference of the RESS shall be measured during the test and reported along with the RESS NEC.

**Tank-to Wheel emissions** - Values for TTW emissions will be presented for CO, HC, NO<sub>x</sub>, PM, CO<sub>2</sub>, N<sub>2</sub>O (if appropriate) and CH<sub>4</sub> (if appropriate)

**Well-to-Tank GHG emissions** - Values for WTT GHG emissions will be presented as appropriate to the fuel in-use

**Well-to-Wheel GHG emissions** - Values for WTW GHG emissions will be presented as appropriate to the fuel in-use

# Appendix 1: Route 159 Drive Cycle


## MILLBROOK LONDON TRANSPORT BUS (MLTB) DRIVE-CYCLE

This test cycle was specifically developed for use with buses and was derived from data logged from a bus in service within inner London.

The drive cycle consists of two phases, a medium speed 'Outer London' phase simulating a journey from Brixton Station to Trafalgar Square and a low speed 'Inner London' phase simulating a journey from Trafalgar Square to the end of Oxford Street.

The cycle is composed of two phases:

- (1) Outer London Phase, nominal distance 6.45 km, 1,380 seconds in duration
- (2) Inner London Phase, nominal distance 2.47 km, 901 seconds duration

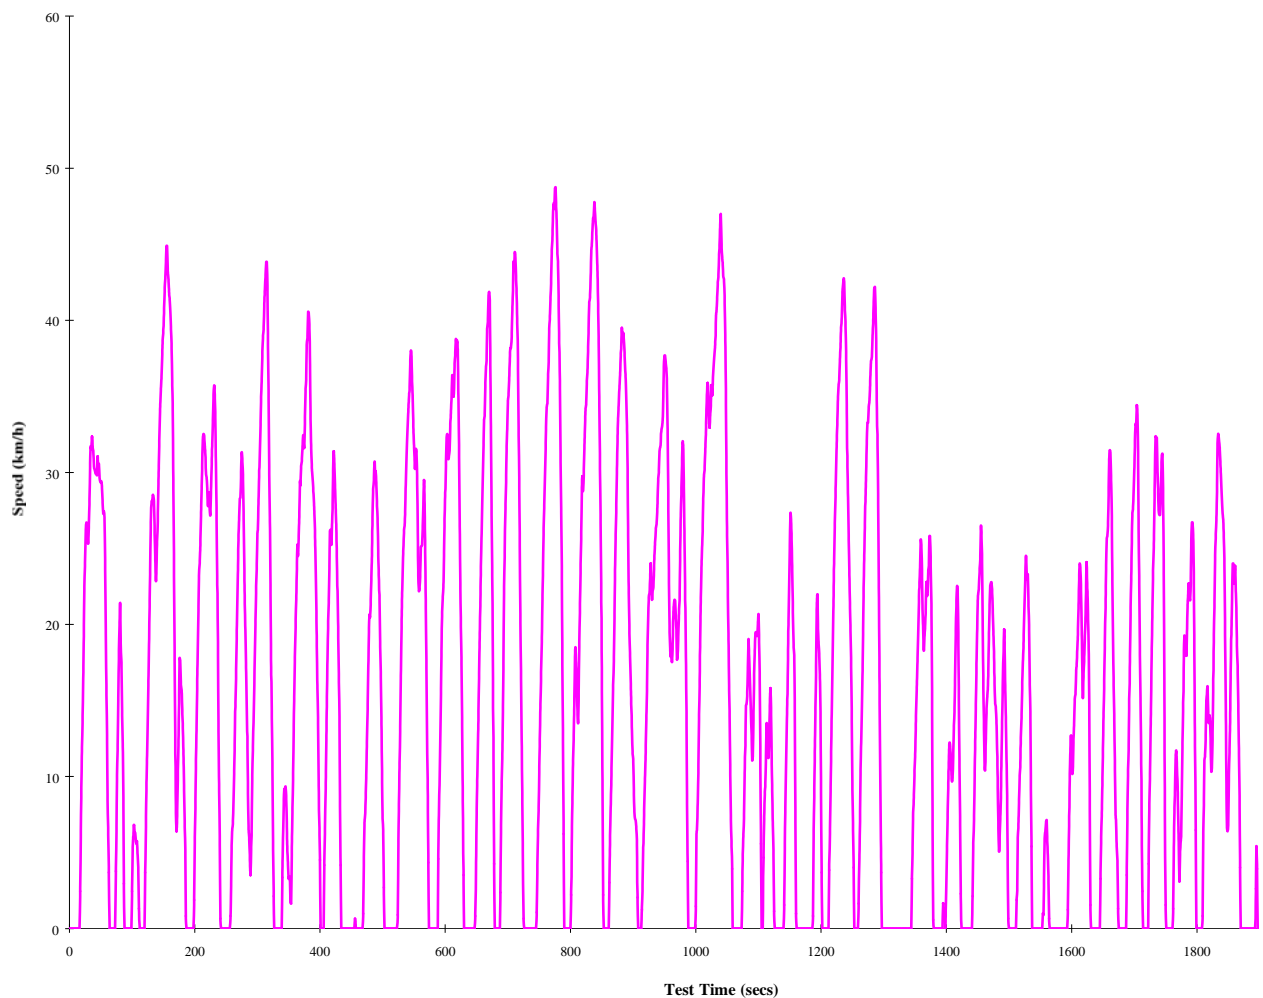

### General information

The overall length of the test is 2,281 seconds and the nominal distance covered is 8.92 km.

Test cell ambient temperature for duration of test =  $18^{\circ}\text{C} \pm 2^{\circ}\text{C}$

## Appendix 2 : Well-to-Wheel calculations

### Worked Examples from a test on a charge sustaining hybrid single deck bus

**Base Vehicle Data: 36 seated passengers, 17 standees, total 53 Passengers.**

Using the bag mass emissions generated from the tests carried out and using the current data supplied from the data logging system, it was possible to derive the NEC corrections required from the chassis dynamometer tests in order to interpolate the level of CO<sub>2</sub> emitted from the test vehicle at zero energy change.

$$NEC = [SOC_{\text{delta}}] * V_{\text{system}}$$

*SOC = state of charge*

*V = nominal system voltage volts*

From the recorded fuel consumption figures it was possible to calculate the fuel energy consumed across each test

Test number	Fuel consumption litres/100km	Fuel used over cycle litres	Net heating energy MJ/litre	Total fuel energy MJ
2006121	25.22	2.2916153	35.67485429	81.75304193
2006123	26.62	2.4005916	35.67485429	85.64075555
2006124	25.7	2.304519	35.67485429	82.21337954
2006125	24.86	2.2217382	35.67485429	79.26018656
2006126	24.5	2.19422	35.67485429	78.27847879

It was then possible to derive the NEC variance across each test and determine suitability of the test for interpolation

Test number	NEC - Kw	NEC - Mega joules (M watt-seconds)	Total cycle energy	NEC variance %
2006121	-0.785397017	-1.791490596	83.54453252	-2.144354085
2006123	1.721049031	3.925712839	81.71504271	4.804149528
2006124	3.057532524	6.974231687	75.23914786	9.269418761
2006125	-1.670999941	-3.811550866	83.07173743	-4.588264292
2006126	-0.17428314	-0.397539843	78.67601863	-0.505287189


The procedure requires that test results can be used without correction if the NEC is less than 1% of total energy used over the drive cycle. If the NEC is between 1 and 5% of total cycle energy, the test results can be corrected by using a linear interpolation method.

Test runs 2006121, 2006123 and 2006125 were used for interpolation

The chassis dynamometer results were are shown in the table below

Test No.	CO <sub>2</sub>
2006121	668.8
2006123	706.0
2006125	659.8

By plotting the test data and interpolating the data points it is possible to determine the CO<sub>2</sub> levels from the vehicle at zero NEC

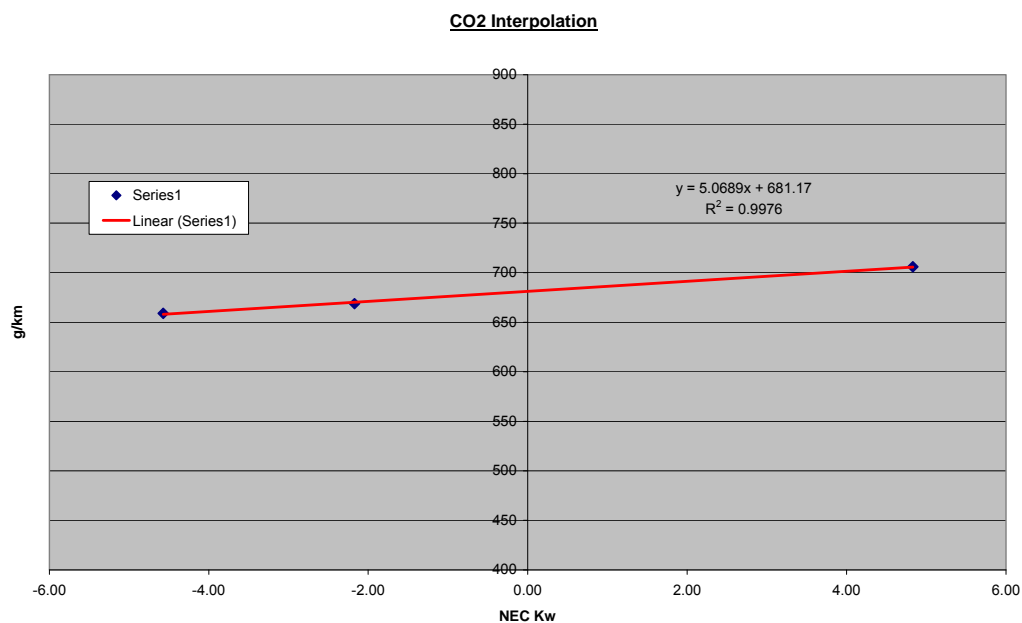

The bus was found to have a CO<sub>2</sub> output when corrected for zero NEC of 681.17 g/km.

This would result in a WTW (well to wheel) CO<sub>2</sub> level of 779.93 g/km.

WTW CO<sub>2</sub> target for a bus with a total passenger capacity of 53 passengers is 864.3 g/km

**Overall Well-to-Wheel is 779.9 g/km. Low Carbon Status OK**

### Appendix 3: Passenger Capacity vs. Greenhouse Gas Emissions (CO<sub>2</sub> equivalent)

Target GHG emissions in g/km by max passenger capacity					
Pass	g/km	Pass	g/km	Pass	g/km
22	639.5	61	922.3	100	1205.0
23	646.8	62	929.5	101	1212.3
24	654.0	63	936.8	102	1219.5
25	661.3	64	944.0	103	1226.8
26	668.5	65	951.3	104	1234.0
27	675.8	66	958.5	105	1241.3
28	683.0	67	965.8	106	1248.5
29	690.3	68	973.0	107	1255.8
30	697.5	69	980.3	108	1263.0
31	704.8	70	987.5	109	1270.3
32	712.0	71	994.8	110	1277.5
33	719.3	72	1002.0	111	1284.8
34	726.5	73	1009.3	112	1292.0
35	733.8	74	1016.5	113	1299.3
36	741.0	75	1023.8	114	1306.5
37	748.3	76	1031.0	115	1313.8
38	755.5	77	1038.3	116	1321.0
39	762.8	78	1045.5	117	1328.3
40	770.0	79	1052.8	118	1335.5
41	777.3	80	1060.0	119	1342.8
42	784.5	81	1067.3	120	1350.0
43	791.8	82	1074.5	121	1357.3
44	799.0	83	1081.8	122	1364.5
45	806.3	84	1089.0	123	1371.8
46	813.5	85	1096.3	124	1379.0
47	820.8	86	1103.5	125	1386.3
48	828.0	87	1110.8	126	1393.5
49	835.3	88	1118.0	127	1400.8
50	842.5	89	1125.3	128	1408.0
51	849.8	90	1132.5	129	1415.3
52	857.0	91	1139.8	130	1422.5
53	864.3	92	1147.0	131	1429.8
54	871.5	93	1154.3	132	1437.0
55	878.8	94	1161.5	133	1444.3
56	886.0	95	1168.8	134	1451.5
57	893.3	96	1176.0	135	1458.8
58	900.5	97	1183.3	136	1466.0
59	907.8	98	1190.5	137	1473.3
60	915.0	99	1197.8	138	1480.5

## Appendix 4: Essential Characteristics of the Vehicle powered by a Charge Sustaining Hybrid Electric Power Train

The following information, when applicable, shall be supplied.

If there are drawings, they shall be to an appropriate scale and show sufficient detail. They shall be presented in A4 format or folded to that format. In the case of microprocessor controlled functions, appropriate operating information shall be supplied.

### 1. GENERAL

- 1.1. Make (name of manufacturer): .....
- 1.2. Type and commercial description (mention any variants): .....
- 1.3. Means of identification of type, if marked on the vehicle: .....
- 1.3.1. Location of that mark: .....
- 1.4. Name and address of manufacturer: .....
- 1.5. Name and address of manufacturer's authorized representative where appropriate: .....

### 2. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE

- 2.1. Photographs and/or drawings of a representative vehicle: .....
- 2.2. Powered axles (number, position, interconnection): .....

### 3. MASSES (kilograms) (refer to drawing where applicable)

- 3.1. Mass of the vehicle with bodywork in running order (including coolant, oils, fuel, tools, spare wheel and driver): .....
- 3.2. Technically permissible maximum laden mass as stated by the manufacturer: .....

### 4. DESCRIPTION OF POWER TRAIN AND POWER TRAIN COMPONENTS

- 4.1. Description of the hybrid electric vehicle
  - 4.1.1. Category of Hybrid Electric vehicle: Off Vehicle Charging/Not Off Vehicle charging 1/
  - 4.1.2. Operating mode switch : with/without 1/
    - 4.1.2.1. Selectable modes:
      - 4.1.2.1.1. Pure electric : yes/no 1/
      - 4.1.2.1.2. Pure fuel consuming : yes/no 1/
      - 4.1.2.1.3. Hybrid modes : yes/no 1/ (if yes, short description)
    - 4.1.3. General description of Hybrid Electric power train
      - 4.1.3.1. Drawing of the hybrid power train system layout (engine/ motor/ transmission combination 1/): .....
      - 4.1.3.2. Description of the general hybrid power train working principle: .....
    - 4.1.4. Vehicle electric range: ..... km
    - 4.1.5. Manufacturer's recommendation for preconditioning: .....
  - 4.2. Internal combustion engine
    - 4.2.1. Engine manufacturer:
    - 4.2.2. Manufacturer's engine code (as marked on the engine, or other means of identification):
      - 4.2.2.1. Working principle: positive-ignition/compression-ignition, four-stroke/two-stroke 1/
      - 4.2.2.2. Number, arrangement and firing order of cylinders: .....
      - 4.2.2.3. Engine capacity: 3/ .....cm<sup>3</sup>
      - 4.2.2.4. Maximum net power: ..... kW at ..... min<sup>-1</sup>
    - 4.2.3. Fuel: petrol / unleaded petrol / diesel oil / LPG / NG 1/

- 4.2.4. Cooling system: liquid/air 1/
- 4.2.5. Intake system:
- 4.2.5.1. Pressure charger: yes/no 1/
- 4.2.5.1.1. Make(s):.....
- 4.2.5.1.2. Type(s): .....
- 4.2.5.1.3. Description of the system (maximum charge pressure: ..... kPa, waste-gate)
- 4.2.5.2. Inter-cooler: yes/no 1/
- 4.2.5.3. Description and drawings of inlet pipes and their accessories (plenum chamber, heating device, additional air intakes, etc.):.....
- 4.2.5.3.1. Intake manifold description (drawings and/or photographs):.....
- 4.2.5.3.2. Air filter, drawings: ..... , or
- 4.2.5.3.2.1. Make(s):.....
- 4.2.5.3.2.2. Type(s): .....
- 4.2.5.3.3. Intake silencer, drawings: ..... , or
- 4.2.5.3.3.1. Make(s):.....
- 4.2.5.3.3.2. Type(s): .....
- 4.2.6. Exhaust system
- 4.2.6.1. Description and drawings of the exhaust system: .....
- 4.2.7. Lubricant used:
- 4.2.7.1. Make:.....
- 4.2.7.2. Type:.....
- 4.3. Measures taken against air pollution:
- 4.3.1. Device for recycling crankcase gases (description and drawings):.....
- 4.3.1.2. Additional pollution control devices (if any, and if not covered by another heading:
- 4.3.1.2.1. Catalytic converter: yes/no 1/
- 4.3.1.2.1.1. Number of catalytic converters and elements: .....
- 4.3.1.2.1.2. Dimensions and shape of the catalytic converter(s) (volume,...):.....
- 4.3.1.2.1.3. Type of catalytic action:.....
- 4.3.1.2.1.4. Total charge of precious metal: .....
- 4.3.1.2.1.5. Relative concentration: .....
- 4.3.1.2.1.6. Substrate (structure and material): .....
- 4.3.1.2.1.7. Cell density: .....
- 4.3.1.2.1.8. Type of casing for catalytic converter(s):.....
- 4.3.1.2.1.9. Positioning of the catalytic converter(s) (place and reference distances in the exhaust system): .....
- 4.3.1.2.1.10. Regeneration systems/method of exhaust after-treatment systems, description:
- 4.3.1.2.1.10.1. The number of MLTB operating cycles, or equivalent engine test bench cycles, between two cycles where regenerative phases occur under the conditions equivalent to MLTB test. ....
- 4.3.1.2.1.10.2. Description of method employed to determine the number of cycles between two cycles where regenerative phases occur:.....
- 4.3.1.2.1.10.3. Parameters to determine the level of loading required before regeneration occurs (i.e. temperature, pressure etc.):.....
- 4.3.1.2.1.10.4. Description of method used to load system during the test: .....
- 4.3.1.2.1.11. Oxygen sensor: yes/no 1/
- 4.3.1.2.1.11.1. Type: .....
- 4.3.1.2.1.11.2. Location of oxygen sensor: .....
- 4.3.1.2.1.11.3. Control range of oxygen sensor: .....
- 4.3.1.2.2. Air injection: yes/no 1/
- 4.3.1.2.2.1. Type (pulse air, air pump,...): .....
- 4.3.1.2.3. Exhaust gas recirculation (EGR): yes/no 1/
- 4.3.1.2.3.1. Characteristics (flow,...):.....
- 4.3.1.2.4. Evaporative emission control system: yes/no 1/
- Complete detailed description of the devices and their state of tune: .....

- Drawing of the evaporative control system: .....
- Drawing of the carbon canister: .....
- Drawing of the fuel tank with indication of capacity and material: .....
- 4.3.1.2.5. Particulate trap: yes/no 1/
- 4.3.1.2.5.1. Dimensions and shape of the particulate trap (capacity):.....
- 4.3.1.2.5.2. Type of particulate trap and design: .....
- 4.3.1.2.5.3. Location of the particulate trap (reference distances in the exhaust system):..
- 4.3.1.2.5.4. Regeneration system/method. Description and drawing: .....
- 4.3.1.2.5.4.1. The number of MLTB operating cycles, or equivalent engine test bench cycle, between two cycles where regeneration phases occur under the conditions equivalent to MLTB test:.....
- 4.3.1.2.5.4.2. Description of method employed to determine the number of cycles between two cycles where regenerative phases occur:.....
- 4.3.1.2.5.4.3. Parameters to determine the level of loading required before regeneration occurs (i.e. temperature, pressure, etc.):.....
- 4.3.1.2.5.4.4. Description of method used to load system during the test: .....
- 4.4. TRACTION BATTERY / ENERGY STORAGE DEVICE
- 4.4.1. Description of the energy storage device: (battery, capacitor, flywheel/generator...)
- 4.4.1.1. Make: .....
- 4.4.1.2. Type: .....
- 4.4.1.3. Identification number: .....
- 4.4.1.4. Kind of electrochemical couple: .....
- 4.4.1.5. Energy: ..... (for battery: voltage and capacity Ah in 2 h, for capacitor: J,...)
- 4.4.1.6. Charger: on board/ external/ without 1/
- 4.5. Electric machines (describe each type of electric machine separately)
- 4.5.1. Make: .....
- 4.5.2. Type: .....
- 4.5.3. Primary use: traction motor / generator 1/
- 4.5.3.1. When used as traction motor: monomotor/ multimotors 1/ (number): .....
- 4.5.4. Maximum power: ..... kW
- 4.5.5. Working principle:
- 4.5.5.1. Direct current/ alternating current /number of phases 1/: .....
- 4.5.5.2. separate excitation / series / compound 1/
- 4.5.5.3. synchronous / asynchronous 1/
- 4.6. Power train control unit
- 4.6.1. Make: .....
- 4.6.2. Type: .....
- 4.6.3. Identification number: .....
- 4.6.4. Software release level: .....
- 4.7. Power controller
- 4.7.1. Make: .....
- 4.7.2. Type: .....
- 4.7.3. Identification number: .....
- 4.7.4. Software release level: .....
- 4.8. Transmission
- 4.8.1. Clutch (type): .....
- 4.8.1.1. Maximum torque conversion: .....
- 4.8.2. Gearbox:
- 4.8.2.1. Type:.....
- 4.8.2.2. Location relative to the engine:.....

4.8.2.3. Method of control:.....

4.8.3. Gear ratios

	Gearbox ratios	Final drive ratios	Total ratios
Maximum for CVT (*)			
1			
2			
3			
4, 5, others			
Minimum for CVT (*)			
Reverse			

(\*) CVT - Continuously variable transmission

## 5. SUSPENSION

5.1. Tyres and wheels

5.1.1. Tyre/wheel combination(s) (for tyres indicate size designation, minimum load-capacity index, minimum speed category symbol; for wheels, indicate rim size(s) and off-set(s):

5.1.1.1. Axles

5.1.1.1.1. Axle 1:.....

5.1.1.1.2. Axle 2:.....

5.1.1.1.3. Axle 3:.....

5.1.1.1.4. Axle 4: etc.....

5.1.2. Upper and lower limit of rolling circumference:

5.1.2.1. Axles

5.1.2.1.1. Axle 1:.....

5.1.2.1.2. Axle 2:.....

5.1.2.1.3. Axle 3:.....

5.1.2.1.4. Axle 4: etc.....

5.1.3. Tyre pressure(s) as recommended by the manufacturer: ..... kPa

## 6. BODYWORK

6.1. Seats:

6.1.1. Number of seats:

## 7. INERTIA MASS

7.1. Equivalent inertia mass of complete front axle: .....

7.2. Equivalent inertia mass of complete rear axle:.....

1/ Strike out what does not apply.

2/ This value must be rounded to the nearest tenth of a millimetre.

3/ This value must be calculated with  $\pi = 3.1416$  and rounded to the nearest  $\text{cm}^3$ .

4/ Specify the tolerance.

## Appendix 5: Test Report and Approval

[Vehicle description and serial number] was submitted for accreditation as a Low Carbon Bus on [date/month/year] by [supplier name and address]

The vehicle was tested to Low Carbon Bus test protocol Annex A2: Test Procedure for Measuring Fuel Economy and Emissions of Low Carbon Buses powered by Charge Sustaining Hybrid Powertrains at [technical service carrying out test]

The bus was inspected by [name of inspector] of [name of accreditation organization]

The Essential Characteristics of the Vehicle are recorded in Appendix 4 of this document.

The test was witnessed by [name of inspector] of [name of accreditation organization]

### Emissions results

Test Number	CO (g/km)	HC (g/km)	NOx (g/km)	PM (g/km)	CO <sub>2</sub> (g/km)	CH <sub>4</sub> * (g/km)	N <sub>2</sub> O* (g/km)

(\*) as appropriate

### Fuel energy consumed over tests

Test Number	Fuel consumption litres/100km	Fuel used over cycle litres	Net heating energy MJ/litre	Total fuel energy MJ

### Net Energy Change over tests

Test Number	NEC - kW	NEC – Mega joules (M watt-seconds)	Total cycle energy	NEC variance %

## Interpolated emissions results at zero SOC (graphical representation to be attached)

CO (g/km)	HC (g/km)	NOx (g/km)	PM (g/km)	CO <sub>2</sub> (g/km)	CH <sub>4</sub> * (g/km)	N <sub>2</sub> O* (g/km)	Energy consumption (MJ)

## Total Tank-to-Wheel GHG – CO<sub>2</sub> equivalence

CO <sub>2</sub> (g/km)	CH <sub>4</sub> (g/km ×21)	N <sub>2</sub> O (g/km ×310)	Total TTW GHG (g/km)

## Well-to- Wheel calculations

Total Tank-to-Wheel GHG (g/km)	
Energy consumption (MJ)	
Fuel type	
Fuel Well-to-Tank pathway value (g/MJ)	
Fuel Well-to-Tank GHG total over test (g)	
Fuel Well-to-Tank GHG (g/km)	
Total Well-to-Wheel GHG (g/km)	
Target WTW for [passenger capacity of bus] (g/km)	
Approved as Low Carbon Bus	Yes/No

## Approval

Low Carbon Vehicle Partnership approves the following vehicle(s) as a Low Carbon Bus for [number of passengers] and above

Manufacturer  
Vehicle Type

## Limitations

All vehicle characteristics to be as defined in Appendix 4 of this document